



## GREASE FITTINGS


The DK-LOK® Valve Grease Fitting is manufactured to allow you to inject grease into a valve without affecting the integrity of the operation. DK-LOK® is connecting the world with products that are manufactured to the most stringent industry standards paired with a service and sales network that spans the globe. Our commitment to “quality without compromise” is essential to delivering true value to our clients. In a competitive world that demands reliable products and exceptional customer support, DK-LOK® delivers.

**We Connect the World.**




## DK-LOK® / Parker PGI – Cross Reference Sheet

### Internal Check




DK-LOK®	Parker PGI	Thread Size (inch)	Body Material	Ball Material	Spring Material
VICS-M-4N-S	IC10N2-CO	1/4"	316 SS	A276 440C	Inconel X-750
VICS-M-6N-S	IC10N3-CO	3/8"	316 SS	A276 440C	Inconel X-750

### Body Vent Bleeder – (Ball Seat)

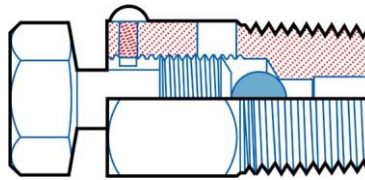

DK-LOK®	Parker PGI	Thread Size (inch)	Body Material	Ball Material
VBVT-M-4N-S	BV10N2-CO	1/4" NPT	316 SS	A276 440C
VBVT-M-6N-S	BV10N3-CO	3/8" NPT	316 SS	A276 440C
VBVT-M-8N-S	BV10N4-CO	1/2" NPT	316 SS	A276 440C


### Body Vent Bleeder – (Conical Seat)

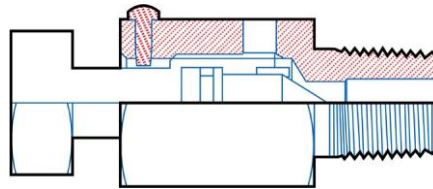

DK-LOK®	Parker PGI	Thread Size (inch)	Body Material
VBVT-M-8N4-S	BV16N4-CO	1/2" NPT	316 SS
VBVT-M-12N4-S	BV16N6-CO	3/4" NPT	316 SS
VBVT-M-16N4-S	BV16N8-CO	1" NPT	316 SS


# DK-LOK®

## Vented Cap Body with Giant Button Head (for 10k PSI) – (Positive Flow)

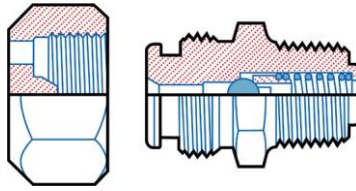


DK-LOK®	Parker PGI	Thread Size (inch)	Body Material	Ball Material	Spring Material
VIC-M-4N-BH-S	BH10N2-CO	1/4" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-6N-BH-S	BH10N3-CO	3/8" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-8N-BH-S	BH10N4-CO	1/2" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-12N-BH-S	BH10N6-CO	3/4" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-16N-BH-S	BH10N8-CO	1" NPT	316 SS	A276 440C	Inconel X-750

## Vented Cap Body without Giant Button Head (for 10k PSI) – (Positive Flow)

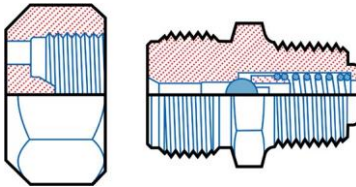

DK-LOK®	Parker PGI	Thread Size (inch)	Body Material	Ball Material	Spring Material
VIC-M-8N-S	BG10N4-CO	1/2" NPT	316 SS	A276 440C	Inconel X-750
VIC-M-16N-S	BG10N8-CO	1" NPT	316 SS	A276 440C	Inconel X-750

## Packing Injection – (Floating Ball Taper Cavity)

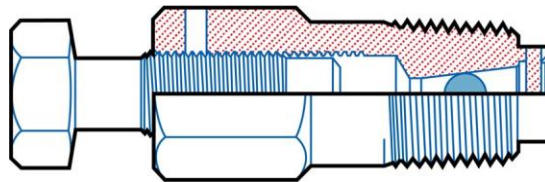

DK-LOK®	Parker PGI	Thread Size (inch)	Body Material	Ball Material
VPI-M-4N-S	PF10N2-CO	1/4"	316 SS	A276 440C
VPI-M-6N-S	PF10N3-CO	3/8"	316 SS	A276 440C
VPI-M-8N-S	PF10N4-CO	1/2"	316 SS	A276 440C



# WE CONNECT THE WORLD

## Tube Fittings / Pipe & Weld Fittings

- Single Ferrule
- Exotic Alloys
- 1/16" - 2"
- Double Ferrule
- PTFE
- 2 mm - 50 mm

## Adapters / Hose Products

- SS Hose Barb
- Tube Adapters
- Quick Connects
- SS JIC
- ORFS
- DIN
- PTFE Hose Assembly
- Metal Hose Assembly

## Valve Products

- Ball Valves
- Relief Valves
- Tee/Inline Filters
- Needle Valves
- Check Valves
- Gauge Root Valves
- Manifold Valves
- Block & Bleed Valves

## Ultra High Purity Products

- Micro-Welds
- VCR Metal Face Seals
- Diaphragms
- High Purity Regulators
- Bellows

## High Pressure

- Ball Valves
- Relief Valves
- Needle Valves
- Check Valves
- Pipe Fitting Adapters
- Up to 150,000 PSI

## Large Bore Ball Valves

- Trunnions
- Stainless Steel
- Exotic Alloys
- Custom
- Floating Ball
- Up to 56" O.D.

**VDK-LOK<sup>®</sup>**